



# ADHESIVE SEALANTS & CAULK

## SMOKE & SOUND SEALANT

### Acoustical Sealant

Acoustical Smoke & Sound Sealant is a durable, flexible, all-purpose acrylic latex adhesive sealant, designed to adhere to most construction surfaces. It is ideal for reducing sound penetration and drafts in all types of wall systems where sound-rated assembly is required.

- ☑ Seals gaps to reduce sound transmission and air drafts
- ☑ Paintable and flexible; full cure in 24 hours
- ☑ Soap and water cleanup
- ☑ Coverage: 1/4 in. bead = 86 linear ft.
- ☑ Tested in accordance with the following specifications:
  - ASTM C834, Type P, Grade -18°C
  - ASTM E90-09 Airborne Sound Transmission Loss
  - ASTM E84-13a Flame Spread Index and Smoke Developed Index
  - ANSI/UL723
  - VOC Compliant: <33 g/L
  - Contributes to LEED points


**Use on:** Most building materials including:



Drywall



Masonry



Metal Studs



Wood



SKU	Description	Size	Tubes/ Master Carton	Master Cartons/ Pallet
GRACSS29	White	29.0 fl oz	12	36



# ADHESIVE SEALANTS & CAULK

## SMOKE & SOUND SEALANT

### Application Temperature

40°F - 100°F

For best results, store adhesive above 40°F.

### Instructions for use


1. Remove dirt, grease, moisture and old caulk. If joint exceeds 1/2 in. x 1/2 in. use backer rod.
2. Cut nozzle to obtain desired bead size and pierce inner foil seal.
3. Place nozzle into joint and apply sealant in gap.
4. Smooth or "tool" bead within 3-5 minutes.
5. Protect from moisture for at least 24 hours for proper cure.

### Cleanup

Tools and adhesive may be cleaned with soap and water.

### Product Safety and Handling

Please review the latest Material Safety Data Sheet (MSDS) and product label for health and safety information, handling instructions, and information on personal protective equipment. MSDS are available upon request at 800-676-7777 or at [www.grip-rite.com](http://www.grip-rite.com).

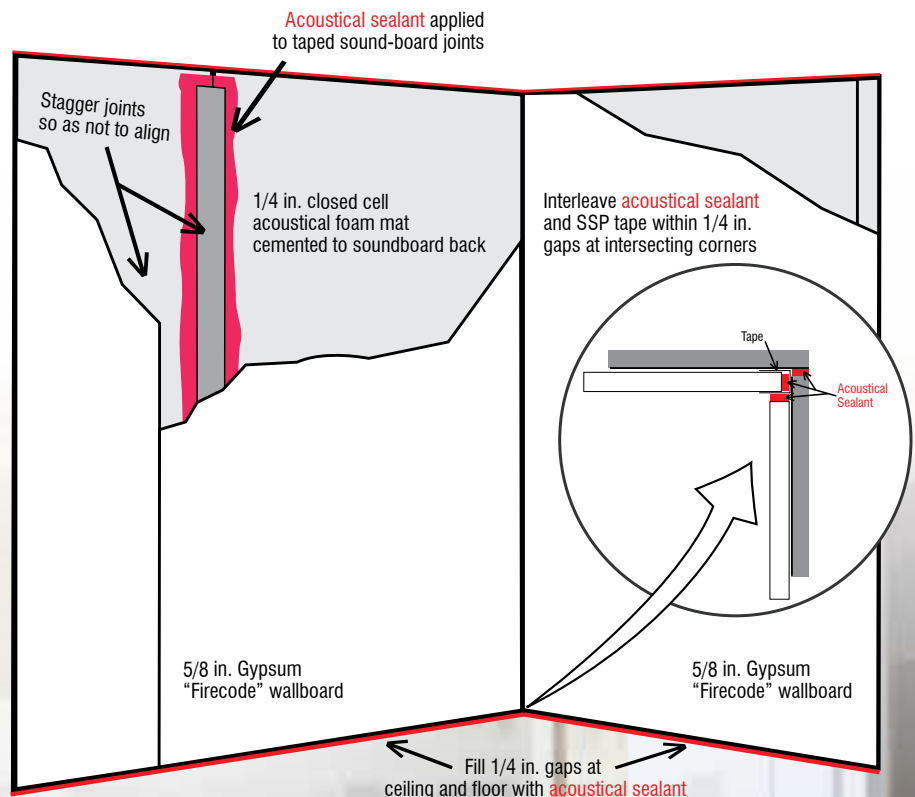

## Sound Control Wall