
TRIM-TEX DRYWALL PRODUCTS

SUBMITTAL SHEET

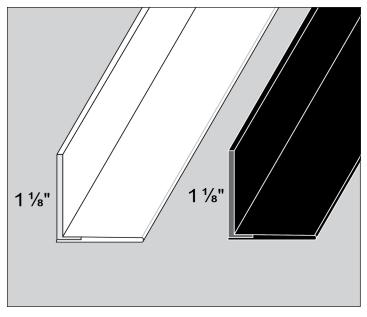

Flex Grid Angle

STOCK #	NAME	PCS/BOX
8158	7⁄8" Angle 8' (White)	63
8158M	⅓" Angle 8' (White)	10
8159	9/16" Angle 8' (White)	
8178M	⅓" Angle 8' (Black)	10
8179M	9/16" Angle 8' (Black)	10

Description: Trim-Tex Flex Grid Angle is designed to finish an acoustical ceiling terminating at any curved wall or surface.

Advantages: Made from rust proof, dent resistant PVC to reduce jobsite and handling damage. Does not contain cellulose, a potential food source for mold

Limitations: Product is designed for interior use.

Applicable Standards: Rigid PVC products made by Trim-Tex achieve a Class A rating for flame spread and smoke developed when tested under ASTM E84.

Surface Characteristics: Trim-Tex products are made from PVC. PVC does not support combustion and is self extinguishing when the source of flame or heat is removed.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. Detailed installation instructions can be found at www.trim-tex.com.

Finishing: Always use a high quality paint.

Accessories: 847 Spray Adhesive and Safety Products distributed by Trim-Tex.

Job Name _	
Contractor .	
Date	

Approvals (Signatures or Stamps)